


XQY-SMAJKS-06-2W

【一、产品参数Parameters/规格指标Specifications】

频率范围 Frequency Range	DC-6GHz	
驻波比 VSWR	1.25:1 Max.	
衰减值及衰减精度	1~10dB	±0.5
	15~30dB	±0.7
	40~50dB	±1.1
	60dB	±1.3
阻抗 Impedance	50 Ω	
介质耐电压 Dielectric withstand voltage	1000V	
使用寿命 Service life	≥500	
绝缘电阻 Insulation Resistance	≥5000 MΩ	
A 接头类型 A Connector Type	SMA-Male	
B 接头类型 B Connector Type	SMA-Female	
工作温度 Operation Temperature	-55℃ ~ +125℃	
内导体材质 Inner conductor material	铍青铜 镀金 Beryllium bronze gold plating	
外导体材质 External conductor material	不锈钢 钝化 Stainless steel passivation	
绝缘体 Insulator	PTFE	
外形尺寸 Outline Dimensions	1~40dB: 9.24*25.5 (mm)	
	40~60dB: 9.24*32.1 (mm)	

【二、规格草图Draft specifications】

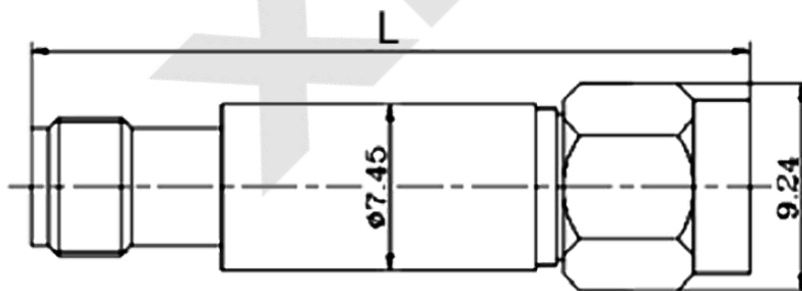

1~40dB: L=25.5mm
40~60dB: L=32.1mm



注: 尺寸(mm/[英寸]), 一般公差(± 0.1)

Note: Dimensions (mm / [inch]), General tolerance (±0.1)